

STRYKER HD

3.5-21×44 FFP

Highest quality ED Glass | Short and lightweight



Thank you for considering this precision optical equipment.

Delta Optical spółka z ograniczoną odpowiedzialnością sp.k.
Nowe Osiny, ul. Piękna 1, 05-300 Mińsk Mazowiecki, Poland
TEL +48 25 786 0520 | FAX +48 25 759 2995
BetterForever@deltaoptical.eu | DeltaOptical.eu



THE AIM IS OPTICAL PERFECTION

STRYKER HD

3.5-21×44 FFP

with DPRC-1 : SKU DO-2514

with DLR-1 : SKU DO-2515



Windage turret capped


Counter Clockwise (CCW)

Wide field of view

Elevation
adjustment range
45 MRAD


Zero-stop
elevation turret

DPRC-1
MRAD

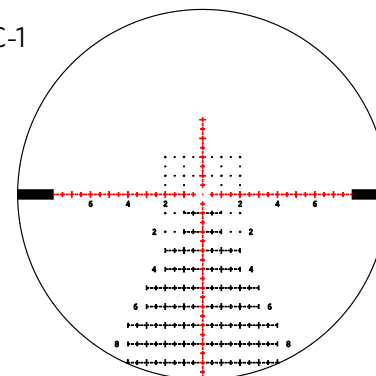

Field of View @ 21x

DLR-1
MRAD

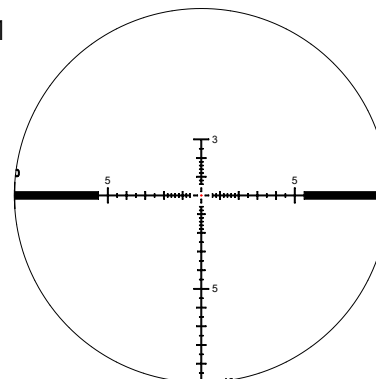

Field of View @ 21x

Magnification Range	3.5x – 21x
Objective Diameter	44mm
Field of View @ 100m	11.1m - 1.9m
Eye Relief	71-99mm
Diopter Range	-3D/+3D
Water Proof (N2)	0.3kg/cm ²
Reticle Position	1st focal plane
Illumination	Dot + Cross*
Counter Clockwise	YES
Per Click	0.1mrad
Per Revolution	10mrad
Elev Adj Range	45mrad
Wind Adj Range	21mrad
Parallax Adjustment	9m – ∞
Zero-Stop	YES
Tube Diameter	34mm
Length	315mm
Weight	805g
Warranty	10 years

* With Reticle DLR-1, illumination Dot only





Included: Throw Lever.



THE AIM IS OPTICAL PERFECTION

DPRC-1


Unique markers every 0,1mrad. Main markers every 0,5mrad.
12mrad Christmas tree. Full reticle illuminated.
Allows PBR strings in PRS.

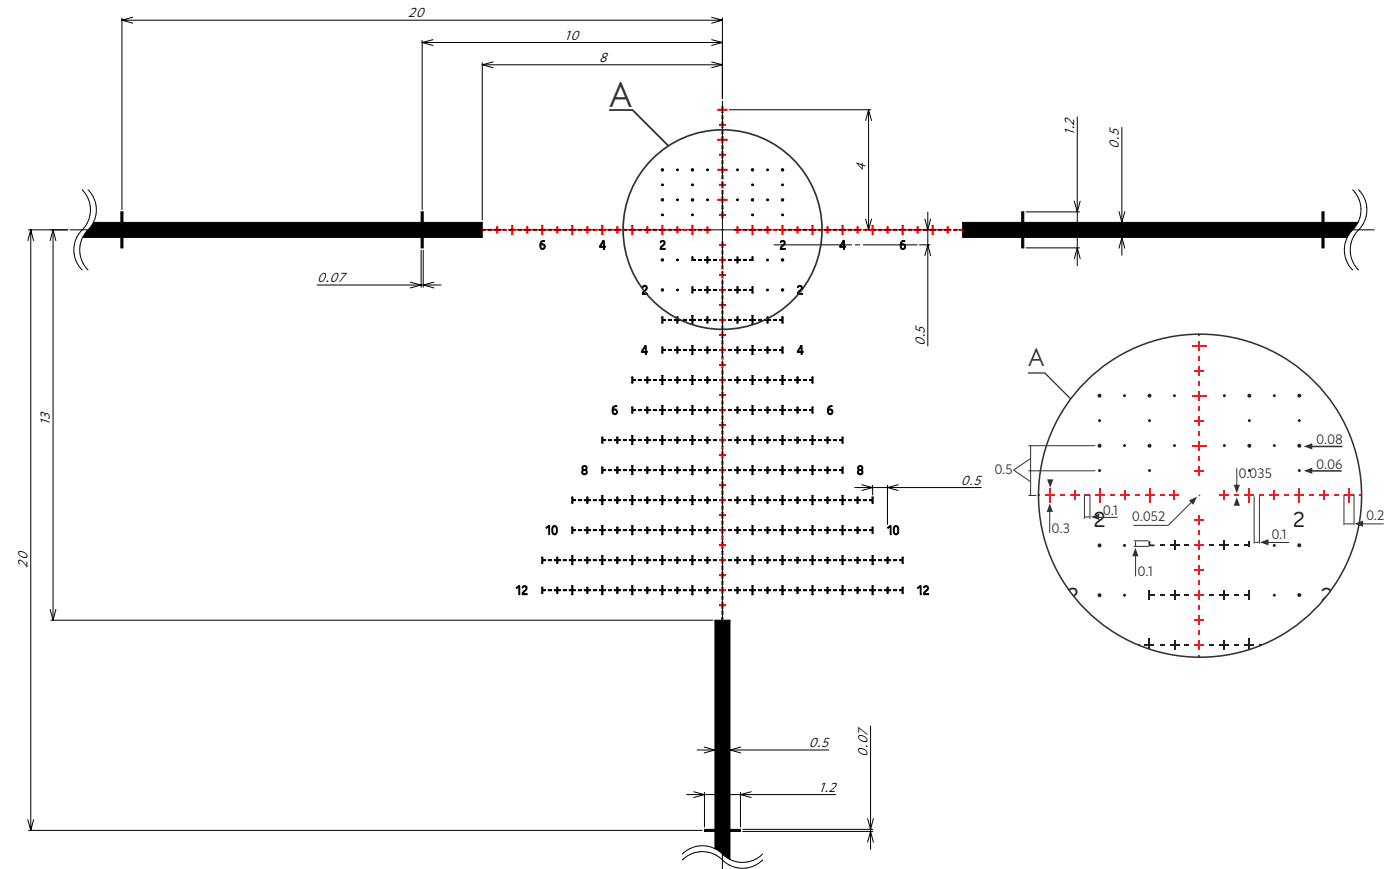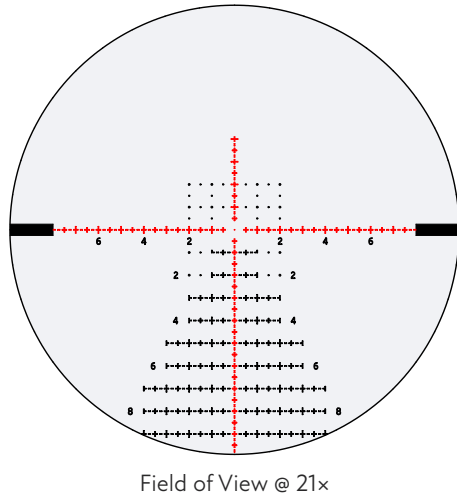

THE AIM IS OPTICAL PERFECTION

DLR-1

Central illuminated dot has a diameter of 0.07mrad. Thin crosshairs 0.05mrad with thick 0.4mrad posts. Crosshairs divided by special markings into lengths of 0.2/0.5/1mrad. For hunters and long range shooters.

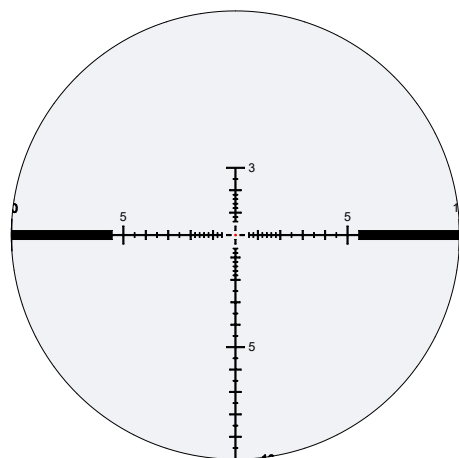

Field of View @ 21x

