



# 2025

SUMMER

THE  
AIM IS  
OPTICAL  
PERFECTION

Pin-point perfection. That's your aim. That's our aim.

Delta is a family company quietly getting on with making some of the finest optical instruments anywhere.

We are proud to have so many satisfied customers across Europe and the world who return to us for their equipment. We thank them for their feedback and ideas that help us constantly improve. Perfection is a never-ending objective.

#### LENS QUALITY BRINGS SUCCESS

HD-optics is a highly refined optical system. All the individual elements have unique anti-reflection coatings resulting in exceptional image quality.

#### EXTREMELY HIGH LIGHT TRANSMISSION

Delta HD systems achieve light transmission of 92% for the optical system and up to 98% for individual layers (tested by DEVA). Delta Titanium has a rightful place among the world's top riflescopes.

#### TOUGH BY DESIGN

Mechanical resistance is critical. Innovative materials and strict build quality means our riflescopes can withstand recoil of up to .50BMG.

#### CLEVER ERGONOMICS

Experienced shooters appreciate our turret zeroing for reliable preservation of their zero and unmatched repeatability. For parallax correction the adjustment dial has been arranged coaxially with illumination. Day-night illumination allows intensity-adjustment of the aiming point.

#### 10 YEAR WARRANTY

All optics, mechanics, electronics in the Stryker and Titanium ranges, covered by a 10-year warranty (except for riflescopes with a tube diameter of 25.4mm)

#### TESTED IN GERMANY BY DEVA

With confidence, we keep testing at the renowned German DEVA institute. These tests confirm the quality of Delta instruments.








#### **CHOSEN BY CHAMPIONS**

Delta is proud to be the choice of champions of the past and of the future. These include: Christer Jacobsen, Winner 2017 Swedish F-Class. Adam MacDonald, Canada. Winner 2018: DCRA F-Class National Championships in Ottawa, Eastern Canada F-Class (FTR) Championship and Atlantic Championship in New Brunswick. Cristi Popescu, Winner Long Range Shooting Competition, Romania. Emile Obriot, Competitive IPSC shooter, World Shoot 2017, European 2016, Multiple French Champion, IPSC instructor.

#### **TRUSTED BY PROFESSIONALS**

Our equipment supports the work of many professionals: Police, Forest Rangers and other uniformed services. We are most privileged to be a supplier of optical equipment to the Polish Mountain Rescue Team (TOPR)




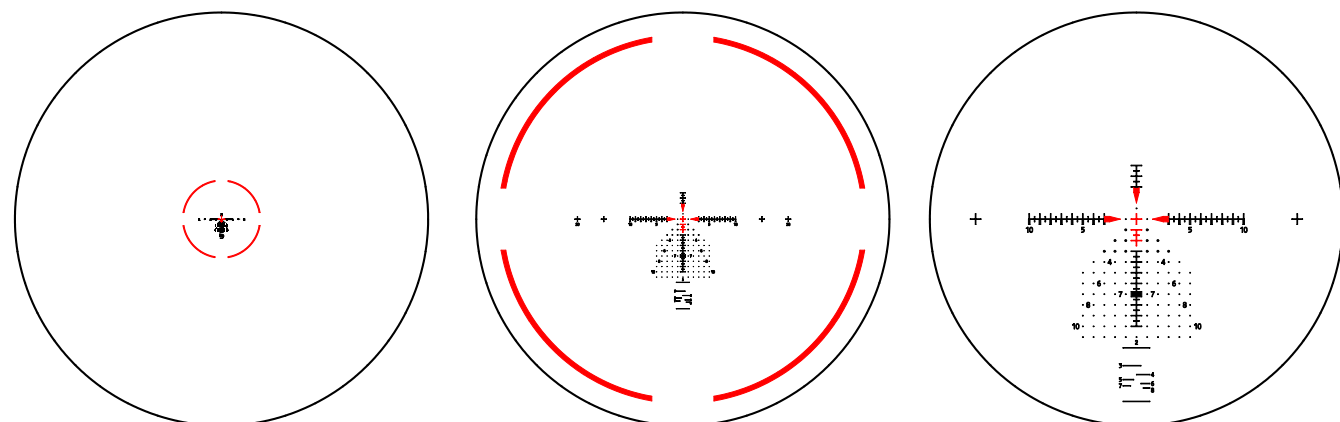

Field of View @ 1x

Field of View @ 5x

Field of View @ 10x

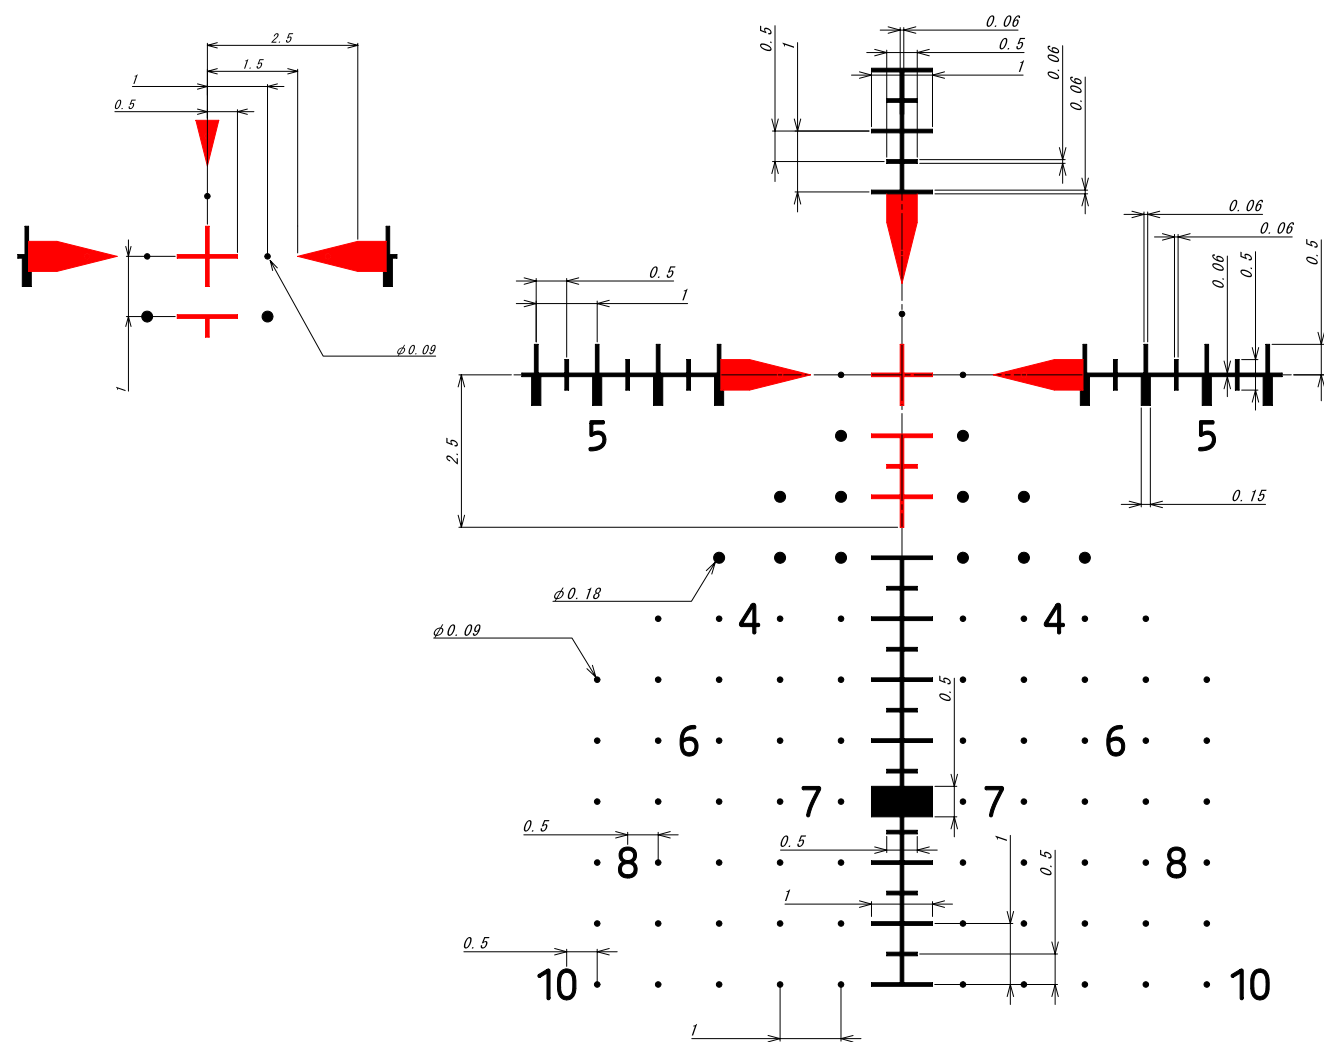

#### SDOG-1 MRAD

Unique true multirange MRAD reticle. 69mrad circle enable speedy shoot at short distance.  
11 mrad Christmas tree with stadiametric rangefinder. Main markers every 0,5mrad, in Christmas tree every 1mrad.

# STRYKER HD 1-10x28 FFP

True Multirange | Even beyond 600m | Highest quality ED Glass



Counter Clockwise (CCW).

Parallax adjustment still  
precise at long range.

Exposed lockable turrets.

Low weight.


INCLUDED:  
Screw-in Throw Lever.




|                      |                       |
|----------------------|-----------------------|
| Magnification Range  | 1x – 10x              |
| Objective Diameter   | 28mm                  |
| Field of View @ 100m | 38.9m - 3.9m          |
| Eye Relief           | 83 - 99mm             |
| Diopter Range        | -2D/+2D               |
| Water Proof (N2)     | 0.3kg/cm <sup>2</sup> |
| Reticle Position     | 1st focal plane       |
| Illumination         | Cross + Ring          |
| Counter Clockwise    | YES                   |
| Per Click            | 0.1mrad               |
| Per Revolution       | 10mrad                |
| Elev Adj Range       | 29mrad                |
| Wind Adj Range       | 23mrad                |
| Parallax Adjustment  | 10m – ∞               |
| Tube Diameter        | 34mm                  |
| Length               | 250mm                 |
| Weight               | 625g                  |
| Warranty             | 10 years              |

with Reticle SDOG-1  
**SKU DO-2517**




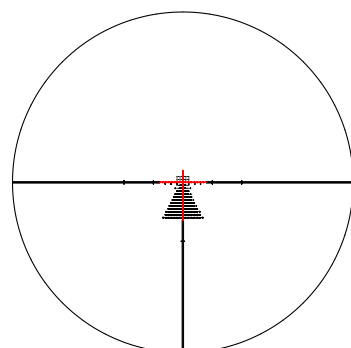


Field of View @ 3.5x

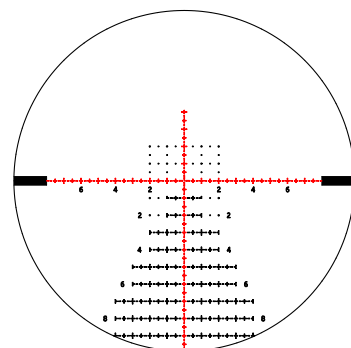


Field of View @ 21x

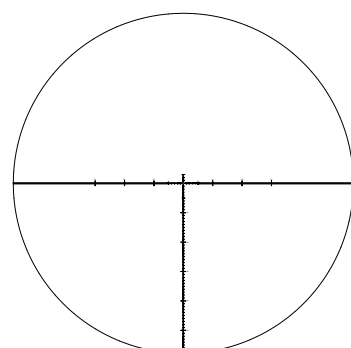

Field of View @ 3.5x

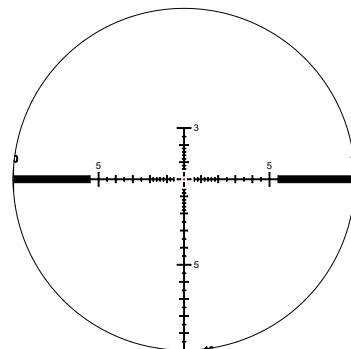


Field of View @ 21x

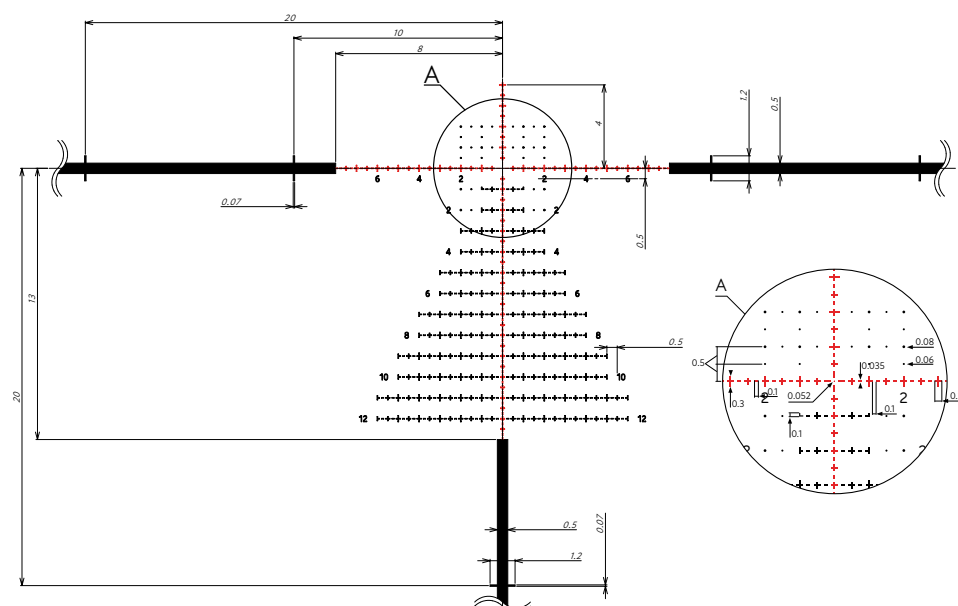

### DPRC-1 MRAD

Unique markers every 0,1mrad. Main markers every 0,5mrad.  
12mrad Christmas tree. Full reticle illuminated.  
Allows PBR strings in PRS.

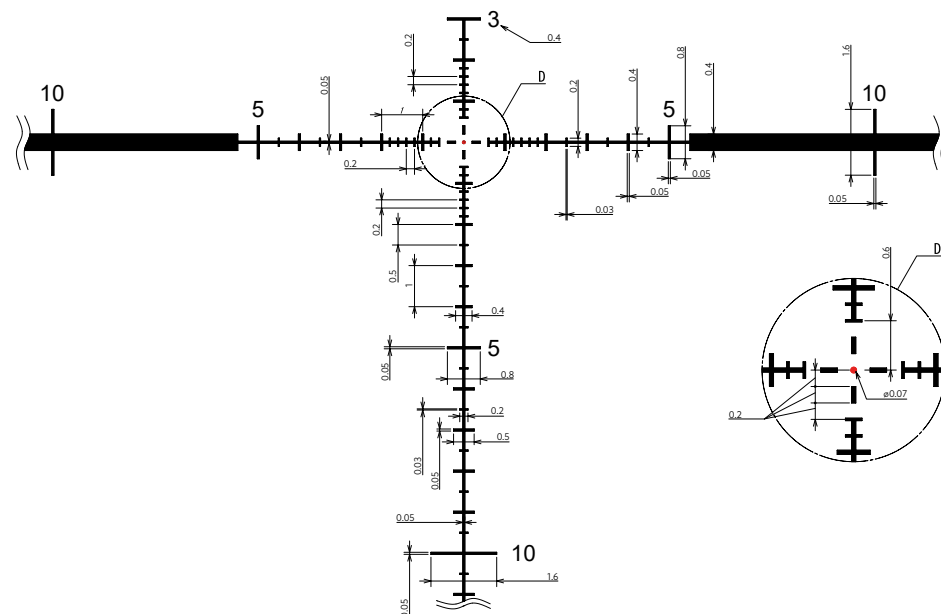

### DLR-3 MRAD

Central illuminated dot has a diameter of 0.07mrad. Thin cosshaers 0.05mrad with thick 0.4mrad posts. Crosshairs divided by special markings into lengths of 0.2/0.5/1mrad. For hunters and long range shooters.

# STRYKER HD 3.5-21x44 FFP

Short and lightweight | Highest quality ED Glass

Counter Clockwise (CCW).



Elevation turret  
with zero-stop.

Elevation adjustment  
range 45 MRAD.



INCLUDED:  
Screw-in Throw Lever.

with Reticle DPRC-1  
**SKU DO-2514**

with Reticle DLR-3  
**SKU DO-2525**

|                      |                       |
|----------------------|-----------------------|
| Magnification Range  | 3.5x – 21x            |
| Objective Diameter   | 44mm                  |
| Field of View @ 100m | 11.1m - 1.9m          |
| Eye Relief           | 71-99mm               |
| Diopter Range        | -3D/+3D               |
| Water Proof (N2)     | 0.3kg/cm <sup>2</sup> |
| Reticle Position     | 1st focal plane       |
| Illumination         | Dot + Cross*          |
| Counter Clockwise    | YES                   |
| Per Click            | 0.1mrad               |
| Per Revolution       | 10mrad                |
| Elev Adj Range       | 45mrad                |
| Wind Adj Range       | 21mrad                |
| Parallax Adjustment  | 9m – ∞                |
| Zero-Stop            | YES                   |
| Tube Diameter        | 34mm                  |
| Length               | 315mm                 |
| Weight               | 805g                  |
| Warranty             | 10 years              |


\* With Reticle DLR-3, illumination Dot only




STRYKER HD

# 4.5-30x56 FFP


Highest quality ED Glass | Superb resolution  
Precision locking turrets | Chosen by tactical shooters and sharpshooters



LRD-1T



LRD-1P



DLR-1

Specially designed reticles are FFP (first focal plane). They are MRAD, convenient to convert into metric units. Click = 0.1mrاد.

**ALL 3 RETICLES DESIGNED TO:**

Not obscure the target in the full range of magnification and never distract the shooter.

Enable quick estimation of the distance to target with known dimensions.

Enable rapid correction of bullet drop and windage, plus velocity corrections.

Compact  
358mm  
1002g.

34mm tube  
vertical adjustment up to 30mrاد (300cm/100m) enables mounting on long range weapons including .50BMG.

High-end multi-layer anti-reflective coatings for a well-defined sharp target and unsurpassed contrast.



Counter Clockwise (CCW).

Zero-Stop mechanism prevents loss of zero after dialing multiple turns of elevation.

Locking turrets guarantee no changes in rough use or transport.

Tool-free zeroing turrets for easy adjustment even with gloves.

|                      |                 |
|----------------------|-----------------|
| Magnification Range  | 4.5x - 30x      |
| Objective Diameter   | 56mm            |
| Field of View @ 100m | 8.3m - 1.2m     |
| Eye Relief           | 81 - 97mm       |
| Diopter Range        | -2D/+3D         |
| Water Proof (N2)     | 0.3kg/cm²       |
| Reticle Position     | 1st focal plane |
| Illumination         | Dot + Cross*    |
| Counter Clockwise    | YES             |
| Per Click            | 0.1mrاد         |
| Per Revolution       | 10mrاد          |
| Elev Adj Range       | 30mrاد          |
| Wind Adj Range       | 15mrاد          |
| Parallax Adjustment  | 23m - ∞         |
| Zero-Stop            | YES             |
| Tube Diameter        | 34mm            |
| Length               | 358mm           |
| Weight               | 1002g           |
| Warranty             | 10 years        |

\* With Reticle DLR-1, illumination Dot only

with Reticle LRD-1T  
**SKU DO-2500**

with Reticle LRD-1P  
**SKU DO-2501**

with Reticle DLR-1  
**SKU DO-2502**



INCLUDED: Sunshader. Screw-in Throw Lever.







STRYKER HD

# 5-50×56 SFP

Highest quality ED Glass | Superb resolution | MOA and MRAD  
Tool-free zeroing | Precision locking turrets | Excellent for F-Class/Benchrest

Three reticle options. All in second focal plane (reticle size does not alter with magnification).


Ranging magnification for measuring size of target or estimating distance is 40×.

The click value of Stryker HD 5-50×56 is 0.05mrad which is paired with the MRAD based DLS-1.

Also available in 1/8MOA clicks when paired with DLS-2 & DLS-3, competition, effective MOA reticles.


**DLS-1**  
**MRAD @ 40×**

Precise centre dot covers 0.03mrad at 100m. 0.005mrad crosshairs in the horizontal and vertical plane have 0.2mrad increments plus 1.0mrad for quick easy adjustments for drop and windage. Very good at lower magnifications (7 - 10×) when centre dot is 0.17 - 0.12mrad. Features day-night illumination.

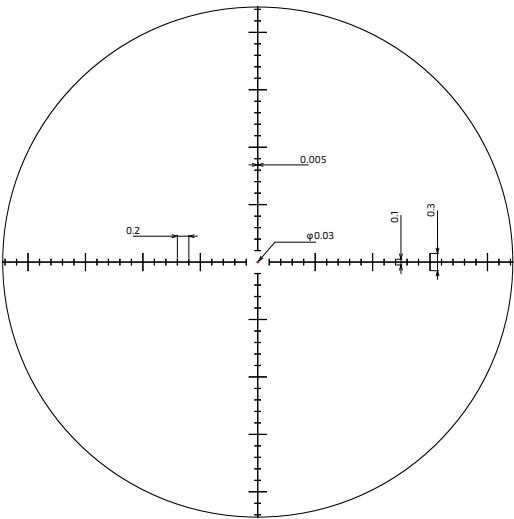

**DLS-2**  
**MOA @ 40×**

Precision in purest form. Two thin 0.02MOA crosshairs intersect in the centre. Uncluttered. Target clear view. Central illuminated point.

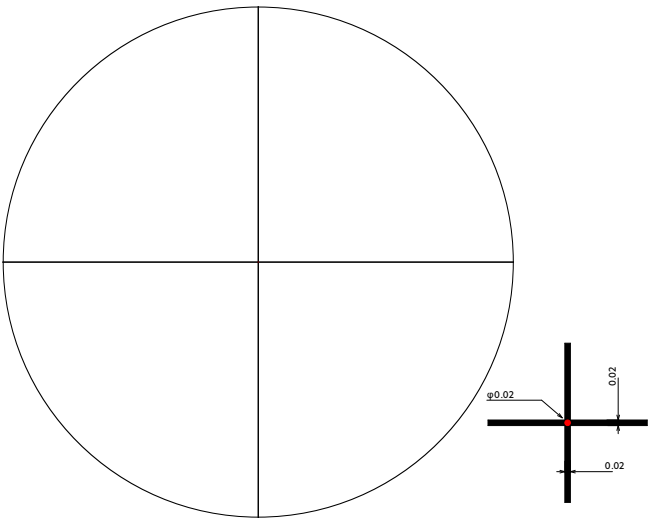

Counter Clockwise (CCW).



Bright sharp image, minimal chromatic aberration. True colour.

Impressive light transmission. Central illuminated crosshair for quick target acquisition even in low light.


34mm diameter tube with vertical adjustment up to 300cm/100m.

Parallax correction from 10m to infinity.

Lockable turrets for easy use even with gloves.

**DLS-3**  
**MOA @ 40×**

Equivalent to DLS-1 reticle, but scaled in MOA. Aiming point covers 0.1MOA (2.91mm at a distance of 100m). Minimal distraction, still with references.

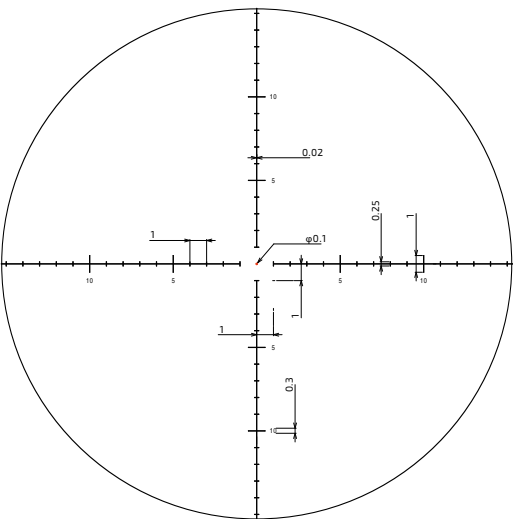

|                            |                 |
|----------------------------|-----------------|
| Magnification Range        | 5× – 50×        |
| Objective Diameter         | 56mm            |
| Field of View @ 100m       | 7.1m - 0.7m     |
| Eye Relief                 | 89 – 100mm      |
| Diopter Range              | -2D/+3D         |
| Water Proof (N2)           | 0.3kg/cm²       |
| Reticle Position           | 2nd focal plane |
| Illumination               | Dot             |
| Counter Clockwise          | YES             |
| Per Click DLS-1            | 0.05mrad        |
| Per Revolution DLS-1       | 5mrad           |
| Elev Adj Range DLS-1       | 30mrad          |
| Wind Adj Range DLS-1       | 15mrad          |
| Per Click DLS-2/DLS-3      | 1/8MOA          |
| Per Revolution DLS-2/DLS-3 | 10MOA           |
| Elev Adj Range DLS-2/DLS-3 | 100MOA          |
| Wind Adj Range DLS-2/DLS-3 | 50MOA           |
| Parallax Adjustment        | 10m – ∞         |
| Zero-Stop                  | YES             |
| Tube Diameter              | 34mm            |
| Length                     | 398mm           |
| Weight                     | 1060g           |
| Warranty                   | 10 years        |

with Reticle DLS-1  
**SKU DO-2504**

with Reticle DLS-2  
**SKU DO-2508**

with Reticle DLS-3  
**SKU DO-2507**

Optional extra:  
FT Parallax Wheel  
SKU DO-2931.




INCLUDED: Sunshader. Screw-in Throw Lever.



**DAMR**

Illuminated center dot ensures rapid target acquisition at any distance and in any light. Positioned in the second focal plane – providing consistent reticle size at 8x.

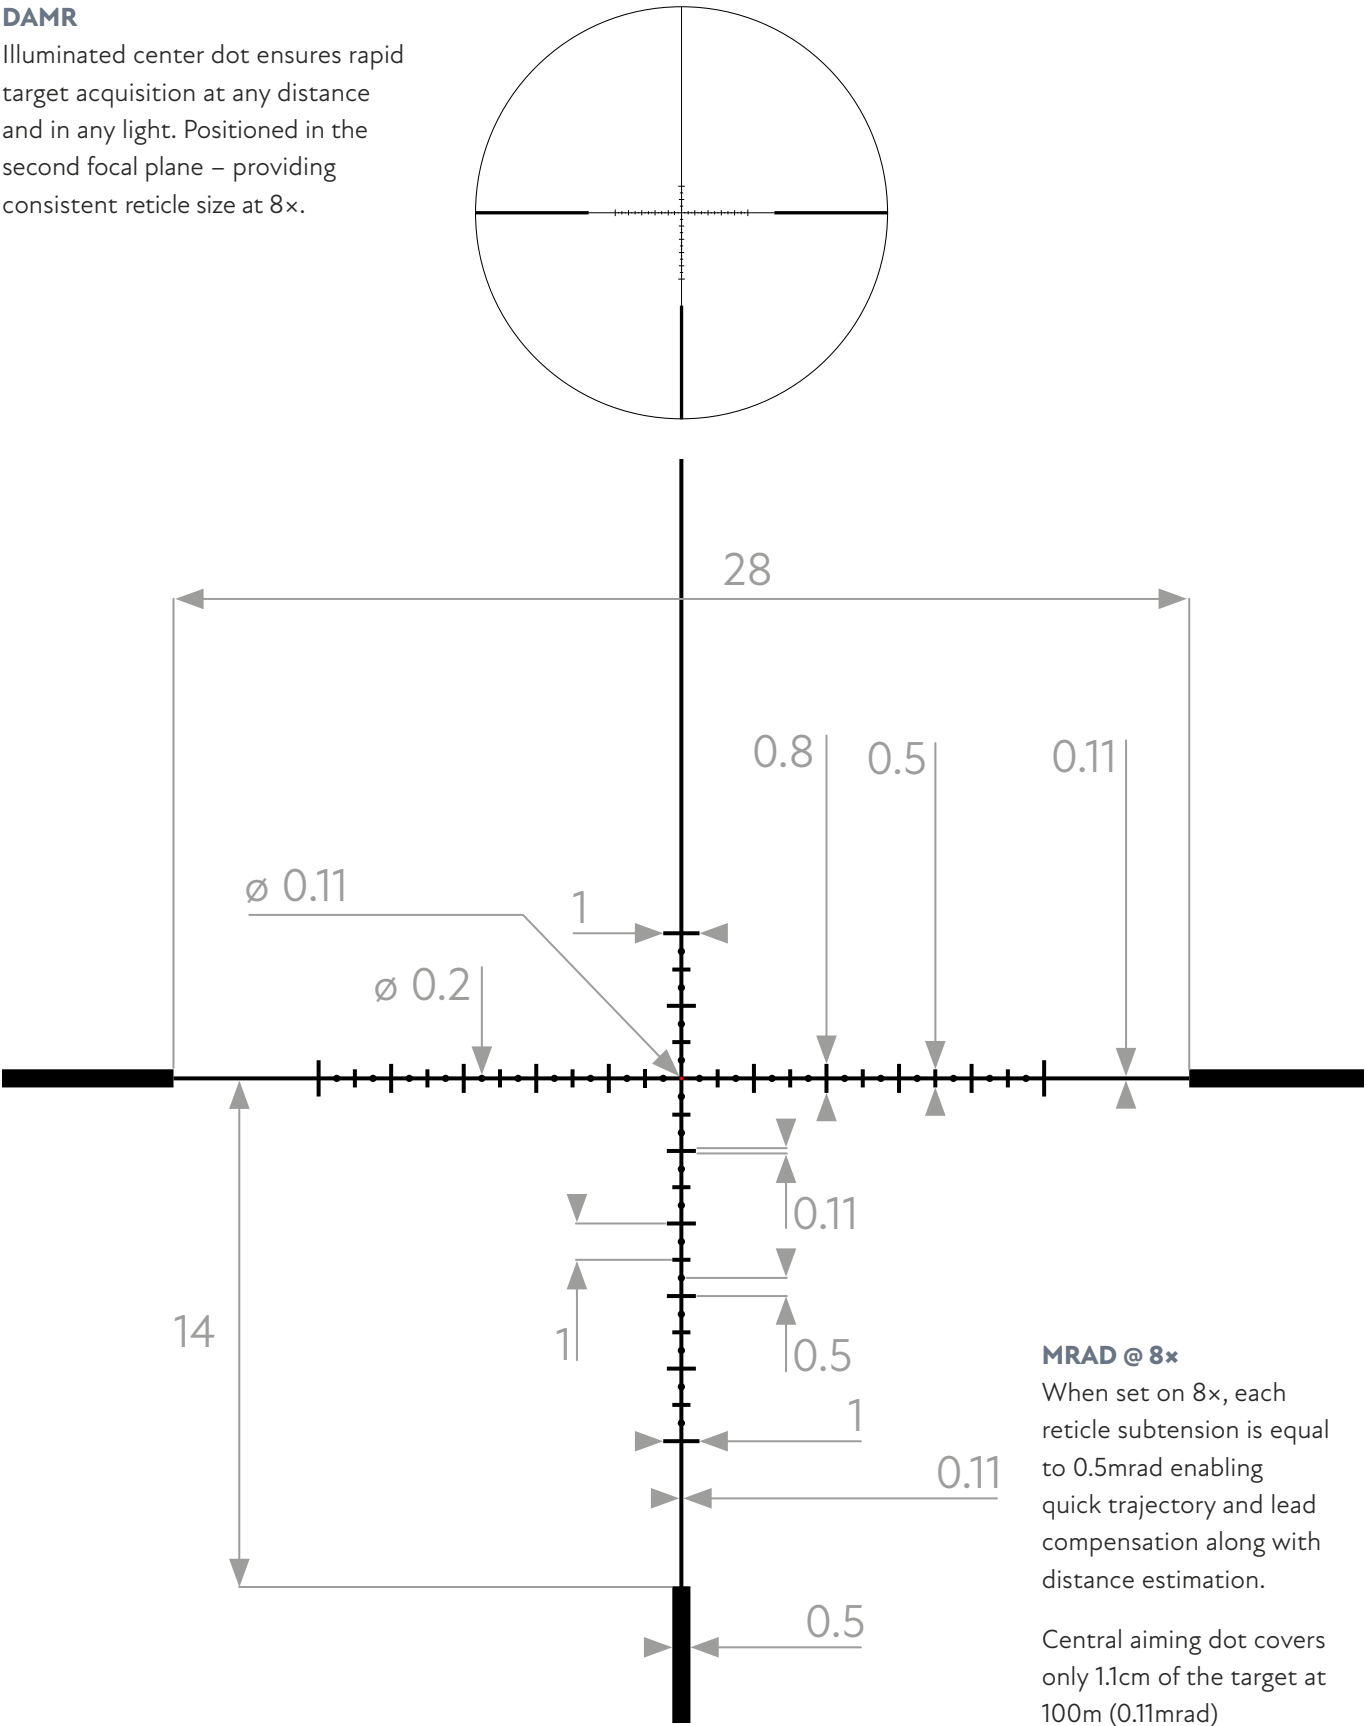

**STRYKER HD**


# 1-8x24 SFP

Wide FOV | Ultra-bright, daylight-visible illuminated dot  
Delta unique low profile ballistic turret | Indication of the exact elevation



Counter Clockwise (CCW).

Extra battery compartment.



**INCLUDED:**  
Screw-in Throw Lever.


|                      |                       |
|----------------------|-----------------------|
| Magnification Range  | 1x - 8x               |
| Objective Diameter   | 24mm                  |
| Field of View @ 100m | 38.9m - 4.9m          |
| Eye Relief           | 82 - 100mm            |
| Diopter Range        | -3D/+3D               |
| Water Proof (N2)     | 0.3kg/cm <sup>2</sup> |
| Reticle Position     | 2nd focal plane       |
| Illumination         | Dot                   |
| Per Click            | 0.1mrad               |
| Elev Adj Range       | 30mrad                |
| Wind Adj Range       | 30mrad                |
| Tube Diameter        | 30mm                  |
| Length               | 264mm                 |
| Weight               | 570g                  |
| Battery              | CR2032                |
| Warranty             | 10 years              |

with reticle DAMR  
**SKU DO-2522**


STRYKER HD

# 1-6x24 SFP


Highest quality HD glass | Ultra-bright, daylight-visible illuminated dot

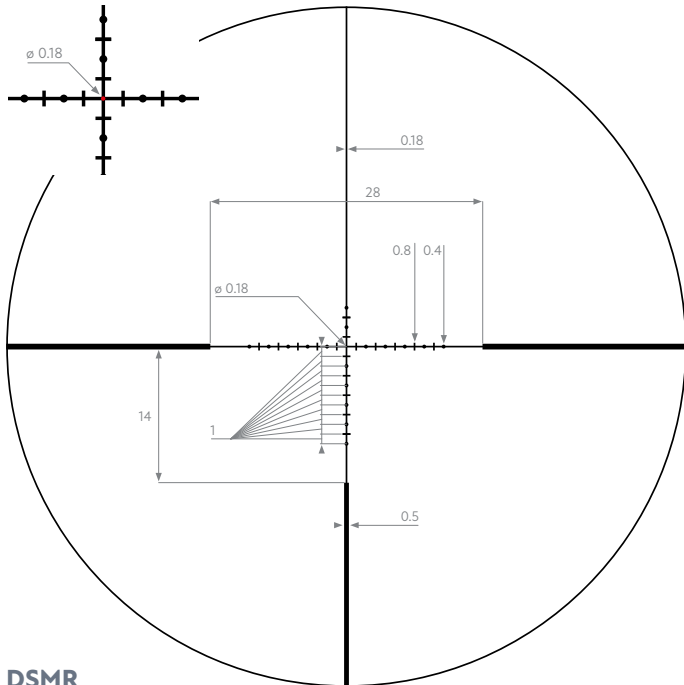


**DSMR**  
Illuminated center dot ensures rapid target acquisition at any distance and in any light. Positioned in the second focal plane – providing consistent reticle size at any magnification as the size of the target changes.



**DSMR**  
**MRAD @ 6x**  
When set on 6x, each reticle subtension is equal to 1.0mrad enabling quick trajectory and lead compensation along with distance estimation.  
  
Central aiming dot covers only 1.8cm of the target at 100m (0.18mrad).

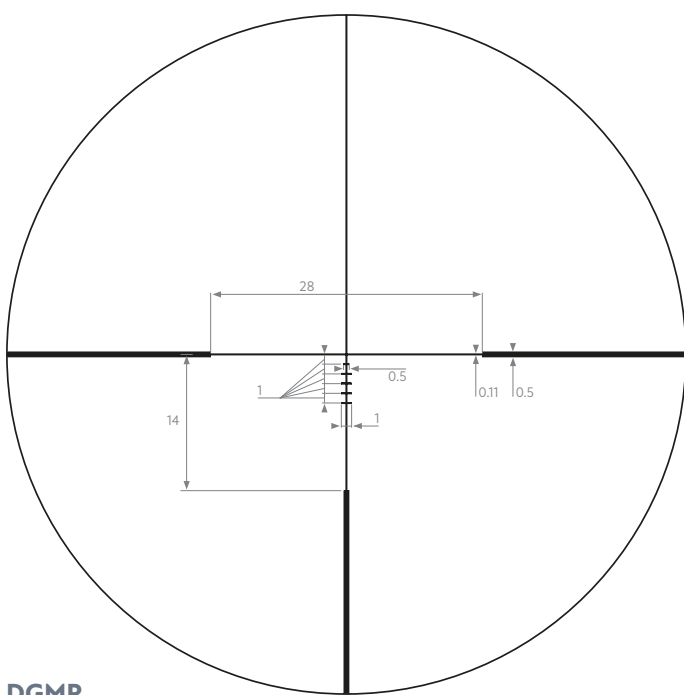

**DGMR**  
DGMR is a simplified version of the DSMR reticle containing only markers for ballistics correction. Especially designed for IPSC and 3-Gun matches.



**DGMR**  
**MRAD @ 6x**  
When set on 6x, each reticle subtension is equal to 1.0mrad enabling quick trajectory and lead compensation along with distance estimation.  
  
Central aiming dot covers only 1.1cm of the target at 100m (0.11mrad).



Tool-free zeroing.  
After zeroing raise turret dial, align with Zero and push back down to lock.

Counter Clockwise (CCW).

Capped low profile turrets prevent unintended changes in windage and elevation.

Smooth, easy magnification changes.

INCLUDED:  
Screw-in Throw Lever.

|                      |                 |
|----------------------|-----------------|
| Magnification Range  | 1x – 6x         |
| Objective Diameter   | 24mm            |
| Field of View @ 100m | 35.6m - 5.9m    |
| Eye Relief           | 86 – 104mm      |
| Diopter Range        | -2D/+3D         |
| Water Proof (N2)     | 0.3kg/cm²       |
| Reticle Position     | 2nd focal plane |
| Illumination         | Dot             |
| Counter Clockwise    | YES             |
| Per Click            | 0.1mrad         |
| Per Revolution       | 10mrad          |
| Elev Adj Range       | 30mrad          |
| Wind Adj Range       | 30mrad          |
| Tube Diameter        | 30mm            |
| Length               | 256mm           |
| Weight               | 508g            |
| Warranty             | 10 years        |

with Reticle DSMR  
**SKU DO-2520**  
  
with Reticle DGMR  
**SKU DO-2521**



JAVELIN

# 3.5-21x50 FFP

Short and lightweight | High quality ED glass | Side focus from 10m

Counter Clockwise (CCW).




Elevation turret:  
locking with zero stop  
and turn indicator.


|                      |                       |
|----------------------|-----------------------|
| Magnification Range  | 3.5x – 21x            |
| Objective Diameter   | 50mm                  |
| Field of View @ 100m | 10.9m - 1.8m          |
| Eye Relief           | 96.4mm                |
| Diopter Range        | -2D/+2D               |
| Water Proof (N2)     | 0.3kg/cm <sup>2</sup> |
| Reticle Position     | 1st focal plane       |
| Illumination         | Dot + cross           |
| Counter Clockwise    | YES                   |
| Per Click            | 0.1mrad               |
| Per Revolution       | 10mrad                |
| Elev Adj Range       | 29mrad                |
| Wind Adj Range       | 29mrad                |
| Parallax Adjustment  | 10m – ∞               |
| Zero-Stop            | YES                   |
| Tube Diameter        | 34mm                  |
| Length               | 353mm                 |
| Weight               | 890g                  |
| Warranty             | 10 years              |

with Reticle MKR-1  
**SKU DO-2473**


with Reticle MKR-2  
**SKU DO-2474**

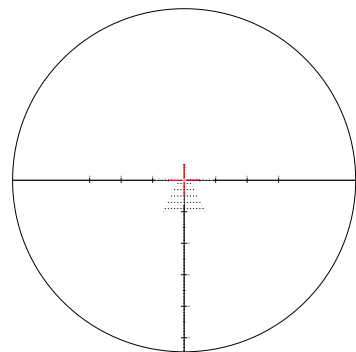


Field of View @ 3.5x

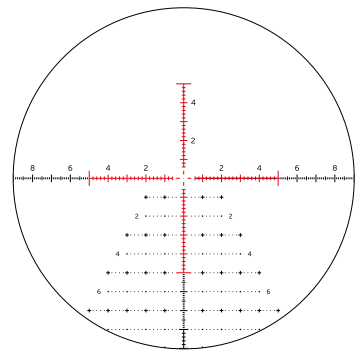


Field of View @ 21x

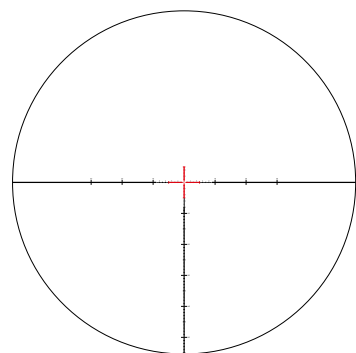

Field of View @ 3.5x

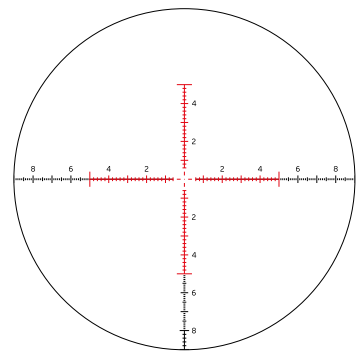


Field of View @ 21x

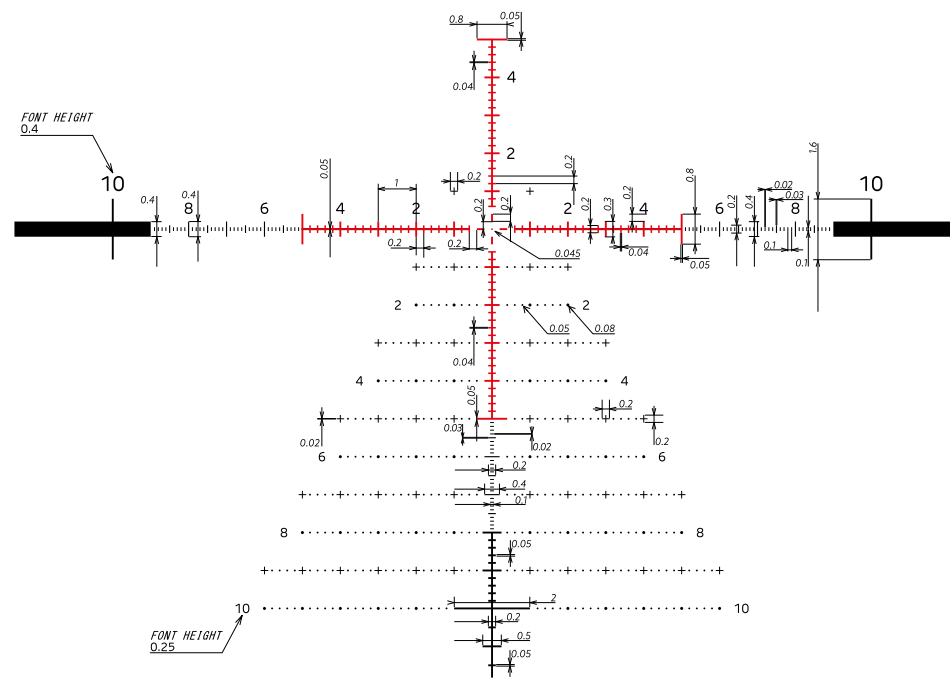

## MKR-1 MRAD

Based on MRAD enables quick elevation, wind correction and determining target distance. Target point is 0.1mrad. Hashes every 0.2mrad. 10mrad Christmas tree.

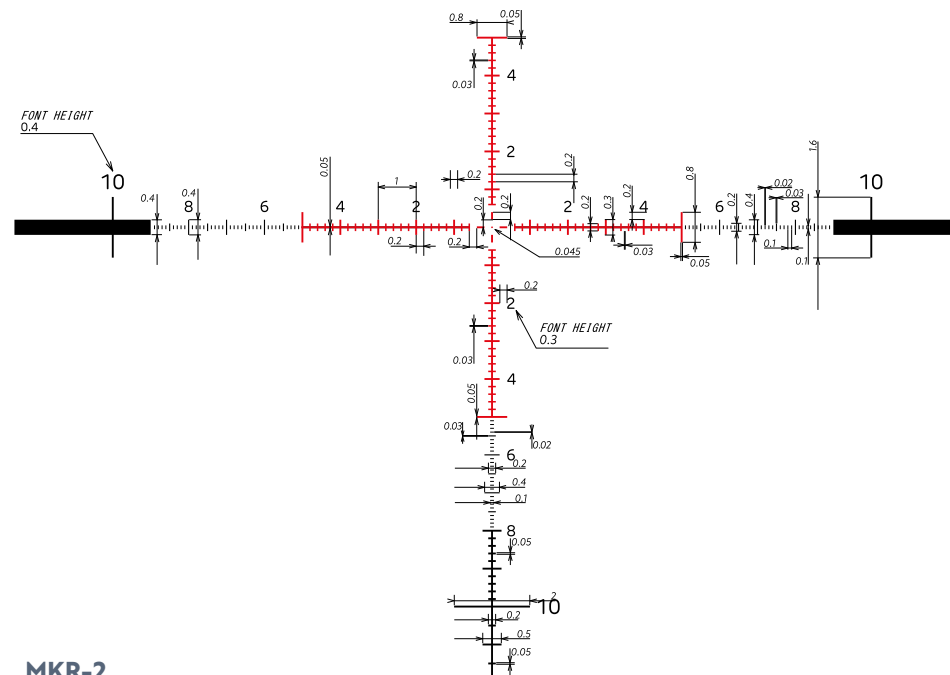


## MKR-2 MRAD

Based on MRAD enables quick elevation, wind correction and determining target distance. Target point is 0.1mrad. Hashes every 0.2mrad.


JAVELIN

# 4.5-30x56 FFP


High quality ED glass | Excellent resolution  
32mrad Elevation/Windage range | Lockable turrets




Field of View @ 4.5x




Field of View @ 30x




Field of View @ 4.5x




Field of View @ 30x



Field of View @ 4.5x




Field of View @ 30x

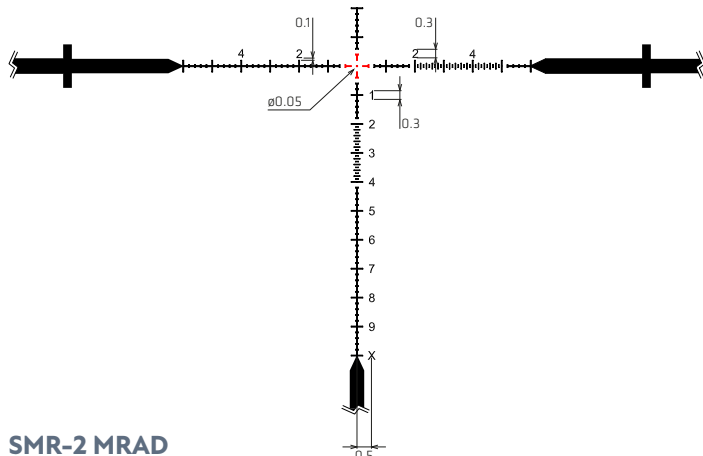


## SMR-2 MRAD

Based on MRAD enables quick elevation, wind correction and determining target distance.  
Target point 0.05mrad. Hashes every 0.2mrad. From 2mrad outwards, graduations in 0.1mrad.

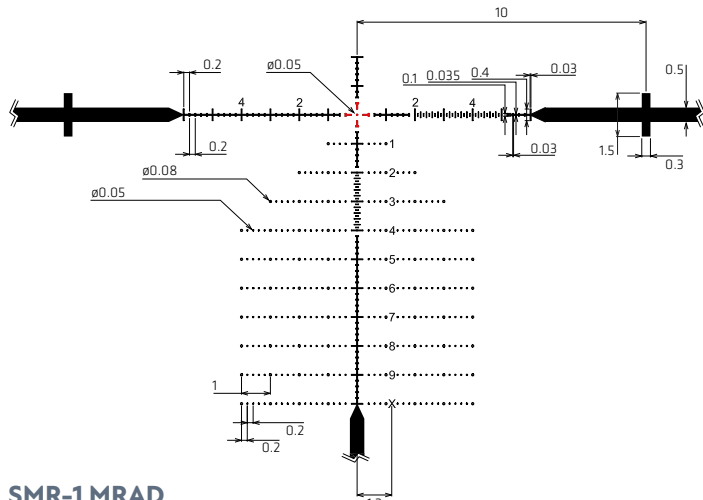

## SMR-1 MRAD

An extension of the SMR-2. Additional markers every 0.2mrad.  
Large or small corrections possible without dialing.

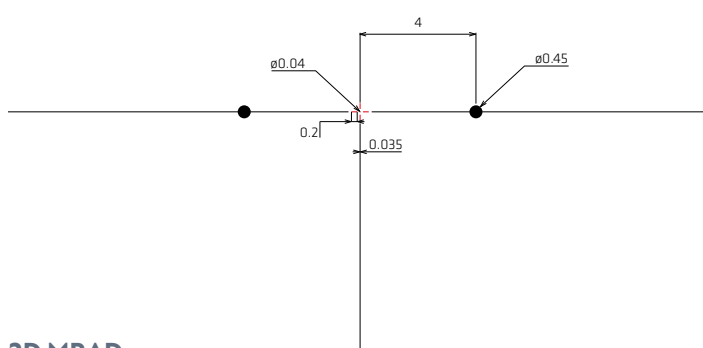

## 2D MRAD

Two extra dots on the horizontal line. The first focal plane is a reticle is useful in the full range of magnification. This is our modern solution for running target competition.



Large adjustment turrets.  
0.1mrad click.  
Counter Clockwise (CCW).

Illuminated aiming point.  
Zero-stop.  
Robust 34mm tube.

Capped turret option,  
only with 2D reticle.

|                      |                       |
|----------------------|-----------------------|
| Magnification Range  | 4.5x – 30x            |
| Objective Diameter   | 56mm                  |
| Field of View @ 100m | 8.2m - 1.3m           |
| Eye Relief           | 100mm                 |
| Diopter Range        | -2D/+2D               |
| Water Proof (N2)     | 0.3kg/cm <sup>2</sup> |
| Reticle Position     | 1st focal plane       |
| Illumination         | Dot + cross           |
| Counter Clockwise    | YES                   |
| Per Click            | 0.1mrad               |
| Per Revolution       | 10mrad                |
| Elev Adj Range       | 32mrad                |
| Wind Adj Range       | 32mrad                |
| Parallax Adjustment  | 25m – ∞               |
| Zero-Stop            | YES   NO*             |
| Tube Diameter        | 34mm                  |
| Length               | 389mm                 |
| Weight               | 1036g   996g*         |
| Warranty             | 10 years              |

\* With Reticle 2D

with Reticle SMR-1  
**SKU DO-2470**

with Reticle SMR-2  
**SKU DO-2471**

with Reticle 2D  
**SKU DO-2472**



Included: Screw-In Throw Lever. Metal Flip-Covers. Sunshader.




TITANIUM HD

# 4-24x50

## WITH INTERCHANGEABLE TURRETS

Highest quality HD glass | Superb light transmission  
Parallax adjustment 10m to infinity | Extra turrets included

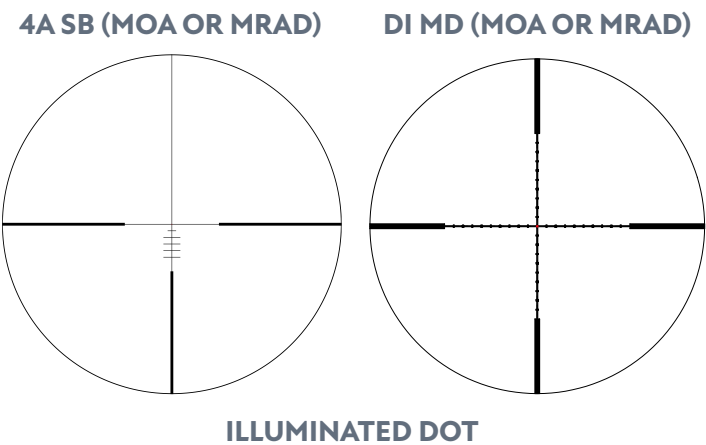

Reticle 4A SB features five ballistic markers distributed at 7cm/100m (12x) for bullet drop compensation.

**INCLUDED IN THE BOX:  
DIALING TURRET**  
Low-profile, capped and exposed.  
Flexibility for hunting and competition.



Counter Clockwise (CCW).

Large, useful,  
6x magnification range  
from 4x to 24x

Parallax adjustment  
side-dial with range  
from 10m to infinity.

Four reticle options,  
with illuminated dot.

|                      |                    |
|----------------------|--------------------|
| Magnification Range  | 4x – 24x           |
| Objective Diameter   | 50mm               |
| Field of View @ 100m | 9.3m – 1.5m        |
| Exit Pupil Diameter  | 7.6 – 2.1mm        |
| Eye Relief           | 80 – 98mm          |
| Water Proof (N2)     | 0.3kg/cm²          |
| Reticle Position     | 2nd focal plane    |
| Illumination         | Dot                |
| Counter Clockwise    | YES                |
| Per Click            | 1/4MOA   0.1mrad   |
| Per Revolution       | 20MOA   10mrad     |
| Elev Adj Range       | 100MOA   34mrad    |
| Wind Adj Range       | 100MOA   34mrad    |
| Parallax Adjustment  | 10m – ∞   10yd – ∞ |
| Diopter Range        | -3D/+2D            |
| Tube Diameter        | 30mm               |
| Length               | 365mm              |
| Weight               | 682g*              |
| Warranty             | 10 years           |

\* With exposed turrets, weight 706g



Turret Swap: How-To video

- with Reticle 4A SB MOA  
**SKU DO-2462**
- with Reticle 4A SB MRAD  
**SKU DO-2463**
- with Reticle DI MD MOA  
**SKU DO-2464**
- with Reticle DI MD MRAD  
**SKU DO-2465**

TITANIUM HD

2.5-15x50

|                      |                 |
|----------------------|-----------------|
| Magnification Range  | 2.5x – 15x      |
| Objective Diameter   | 50mm            |
| Field of View @ 100m | 14.4m – 2.5m    |
| Exit Pupil Diameter  | 11.6–3.4mm      |
| Eye Relief           | 98 – 99mm       |
| Water Proof (N2)     | 0.3kg/cm²       |
| Reticle Position     | 2nd focal plane |
| Illumination         | Dot             |
| Counter Clockwise    | YES             |
| Per Click            | 1/4MOA          |
| Per Revolution       | 12MOA           |
| Elev Adj Range       | 50MOA           |
| Wind Adj Range       | 50MOA           |
| Parallax Adjustment  | 15m – ∞         |
| Tube Diameter        | 30mm            |
| Length               | 370mm           |
| Weight               | 704g            |
| Warranty             | 10 years        |


Highest quality HD glass  
Superb light transmission.

Refined balance of  
performance/flexibility/weight.

Counter Clockwise (CCW).



Unique 2D reticle with  
two dots for lead estimation,  
scaled at a magnification of 8x

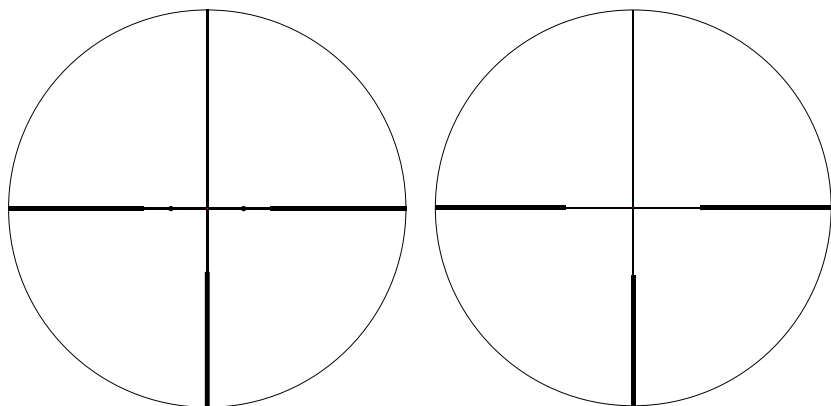

2D

4A S

ILLUMINATED DOT

with Reticle 2D  
SKU DO-2448

with Reticle 4A S  
SKU DO-2449

TITANIUM HD

4-24x50

Highest quality HD glass  
Superb light transmission.


Counter Clockwise (CCW).



Magnification  
range for flexibility.

Parallax adjustment  
10m to infinity.

Reticle 4A SB  
features five ballistic  
markers distributed  
at 7cm/100m (12x)  
for bullet drop compensation.

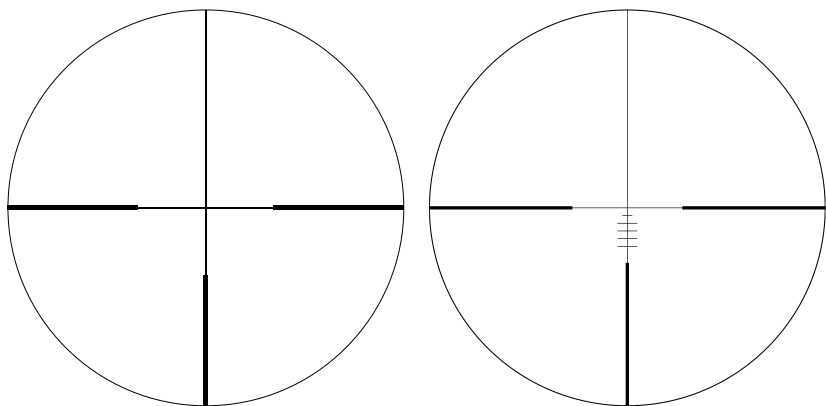

4A S

4A SB

ILLUMINATED DOT

|                      |                 |
|----------------------|-----------------|
| Magnification Range  | 4x – 24x        |
| Objective Diameter   | 50mm            |
| Field of View @ 100m | 9.3m – 1.5m     |
| Exit Pupil Diameter  | 7.6 – 2.1mm     |
| Eye Relief           | 80 – 98mm       |
| Water Proof (N2)     | 0.3kg/cm²       |
| Reticle Position     | 2nd focal plane |
| Illumination         | Dot             |
| Counter Clockwise    | YES             |
| Per Click            | 1/4MOA          |
| Per Revolution       | 20MOA           |
| Elev Adj Range       | 100MOA          |
| Wind Adj Range       | 100MOA          |
| Parallax Adjustment  | 10m – ∞         |
| Diopter Range        | -3D/+2D         |
| Tube Diameter        | 30mm            |
| Length               | 369mm           |
| Weight               | 682g            |
| Warranty             | 10 years        |

with Reticle 4A S  
SKU DO-2460

with Reticle 4A SB  
SKU DO-2461



T H E A I M I S O P T I C A L P E R F E C T I O N








TITANIUM HD

# 2.5-15x56

Highest quality HD glass | Phenomenal light transmission  
Punchy high-contrast | Daylight-visible Red Dot

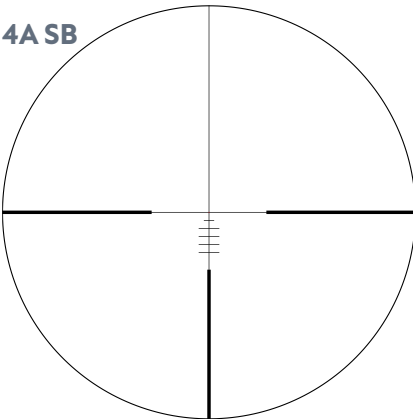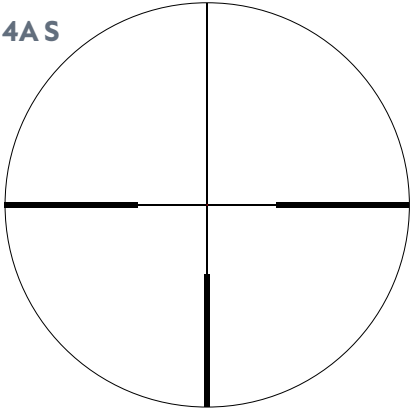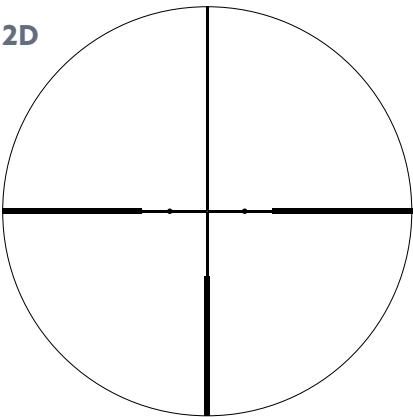

EACH WITH ILLUMINATED DOT

Reticle 4A SB has five ballistic markers distributed at 10cm/100m (8x) for bullet drop compensation



|                      |                 |
|----------------------|-----------------|
| Magnification Range  | 2.5x – 15x      |
| Objective Diameter   | 56mm            |
| Field of View @ 100m | 14.4m – 2.5m    |
| Exit Pupil Diameter  | 11.6 – 3.7mm    |
| Eye Relief           | 98 – 99mm       |
| Water Proof (N2)     | 0.3kg/cm²       |
| Reticle Position     | 2nd focal plane |
| Illumination         | Dot             |
| Counter Clockwise    | YES             |
| Per Click            | 1/4MOA          |
| Per Revolution       | 12MOA           |
| Elev Adj Range       | 50MOA           |
| Wind Adj Range       | 50MOA           |
| Parallax Adjustment  | 15m – ∞         |
| Tube Diameter        | 30mm            |
| Length               | 364mm           |
| Weight               | 780g            |
| Warranty             | 10 years        |

with Reticle 2D  
**SKU DO-2457**

with Reticle 4A S  
**SKU DO-2453**

with Reticle 4A SB  
**SKU DO-2454**



TITANIUM HD

2.5-10x50

Highest quality HD Glass | Superb light-transmission

Lightweight high-performance scope

|                      |                 |
|----------------------|-----------------|
| Magnification Range  | 2.5x – 10x      |
| Objective Diameter   | 50mm            |
| Field of View @ 100m | 14.4m – 3.7m    |
| Exit Pupil Diameter  | 11.6 - 5mm      |
| Eye Relief           | 98 – 99mm       |
| Water Proof (N2)     | 0.3kg/cm²       |
| Reticle Position     | 2nd focal plane |
| Illumination         | Dot             |
| Counter Clockwise    | YES             |
| Per Click            | 1/4MOA          |
| Per Revolution       | 12MOA           |
| Elev Adj Range       | 50MOA           |
| Wind Adj Range       | 50MOA           |
| Tube Diameter        | 30mm            |
| Length               | 370mm           |
| Weight               | 700g            |
| Warranty             | 10 years        |





Brilliant HD optics.

Simple Clear Reticle 4A S.

Large Exit Pupil.

with Reticle 4A S

SKU DO-2447

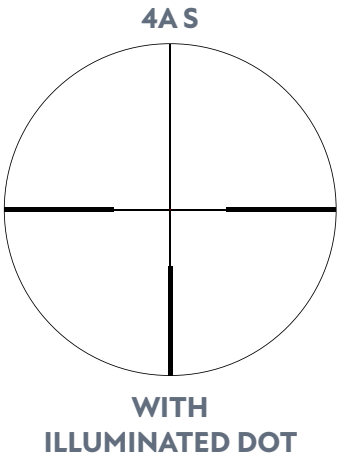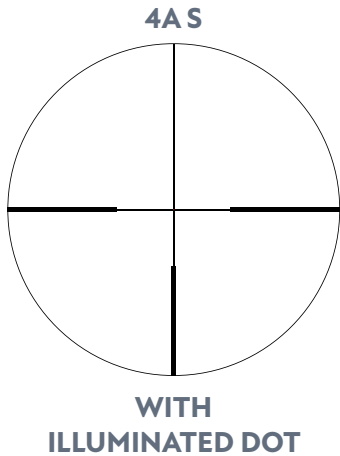

Brilliant HD optics.

Two illumination versions available.

|                      |                 |
|----------------------|-----------------|
| Magnification Range  | 2.5x – 10x      |
| Objective Diameter   | 56mm            |
| Field of View @ 100m | 14.4m – 3.7m    |
| Exit Pupil Diameter  | 11.6 – 5.6mm    |
| Eye Relief           | 98 – 99mm       |
| Water Proof (N2)     | 0.3kg/cm²       |
| Reticle Position     | 2nd focal plane |
| Illumination         | Dot             |
| Counter Clockwise    | YES             |
| Per Click            | 1/4MOA          |
| Per Revolution       | 12MOA           |
| Elev Adj Range       | 50MOA           |
| Wind Adj Range       | 50MOA           |
| Tube Diameter        | 30mm            |
| Length               | 364mm           |
| Weight               | 719g            |
| Warranty             | 10 years        |

with Reticle 4A S (HD)

SKU DO-2450

with Reticle 4A S (HD Di)

SKU DO-2451

VERSION HD

Ergonomic day-night backlight intensity control dial on the left side of scope.

VERSION HD Di

Precise digital adjustment of the backlight intensity and memory setting.




TITANIUM HD

1.5-9x45

|                      |                  |
|----------------------|------------------|
| Magnification Range  | 1.5× – 9×        |
| Objective Diameter   | 45mm             |
| Reticle Position     | 2nd focal plane  |
| Field of View @100m  | 25.4m – 4.2m     |
| Exit Pupil Diameter  | 11 – 5mm         |
| Eye Relief           | 81 – 94mm        |
| Illumination         | Dot              |
| Counter Clockwise    | YES              |
| Per Click            | 1/4MOA   0.1mrad |
| Per Revolution       | 18MOA   5mrad    |
| Elevation Adjustment | 60MOA   20mrad   |
| Windage Adjustment   | 60MOA   20mrad   |
| Tube Diameter        | 30mm             |
| Water Proof (N2)     | 0.3kg/cm²        |
| Length               | 323mm            |
| Weight               | 680g             |
| Warranty             | 10 years         |

Ultra-compact 32cm | Superb light-transmission

Highest quality HD Glass | Crisp, high-resolution

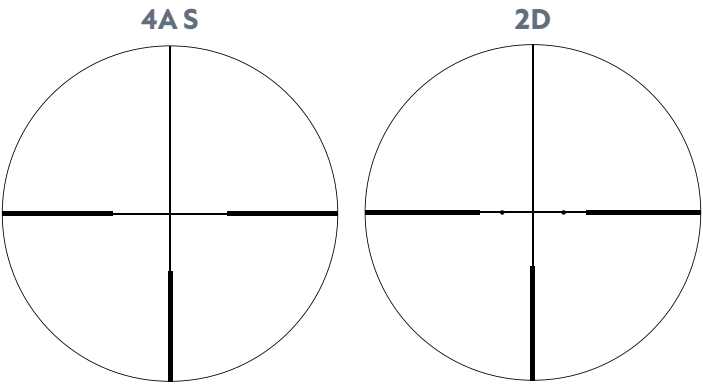

EACH WITH ILLUMINATED DOT

with Reticle 4A S (MOA)

SKU DO-2467

with Reticle 2D

SKU DO-2466

with Reticle 4A S (MRAD)


SKU DO-2468

TITANIUM HD

1-6x24

Highest quality HD Glass

Compact, lightweight | Driven Hunt favourite

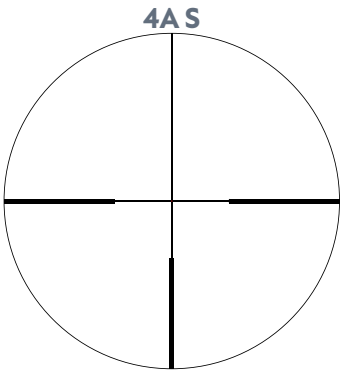

WITH ILLUMINATED DOT



|                      |                 |
|----------------------|-----------------|
| Magnification Range  | 1× - 6×         |
| Objective Diameter   | 24mm            |
| Field of View @ 100m | 35.6m - 5.9m    |
| Exit Pupil Diameter  | 11.4 - 4.0mm    |
| Eye Relief           | 86 - 104mm      |
| Water Proof (N2)     | 0.3kg/cm²       |
| Reticle Position     | 2nd focal plane |
| Illumination         | Dot             |
| Counter Clockwise    | YES             |
| Per Click            | 1/4MOA          |
| Per Revolution       | 24MOA           |
| Elev Adj Range       | 80MOA           |
| Wind Adj Range       | 80MOA           |
| Tube Diameter        | 30mm            |
| Length               | 255mm           |
| Weight               | 498g            |
| Warranty             | 10 years        |

Counter Clockwise (CCW).

Unusually large

field of view (35.6m

at 100m) provides

comfort of a precise

shot while maintaining

maximum awareness.

6× zoom range

enables fast,

reliable targeting

and accuracy.

with Reticle 4A S


SKU DO-2436




HORNET

# 1-6x24 SFP


Ideal for AR type weapon  
1x for two eyes fast targeting | 6x for precision

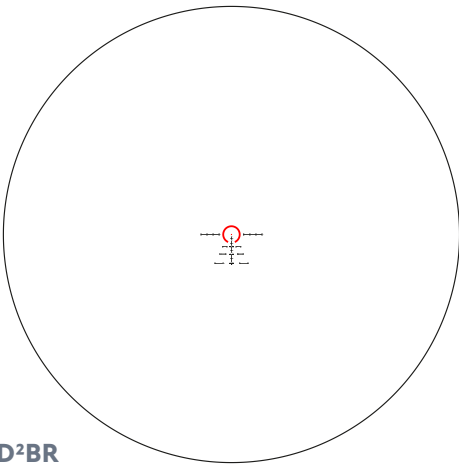


**D²BR**  
**MRAD @ 6x**  
Simple. For short and medium distances.

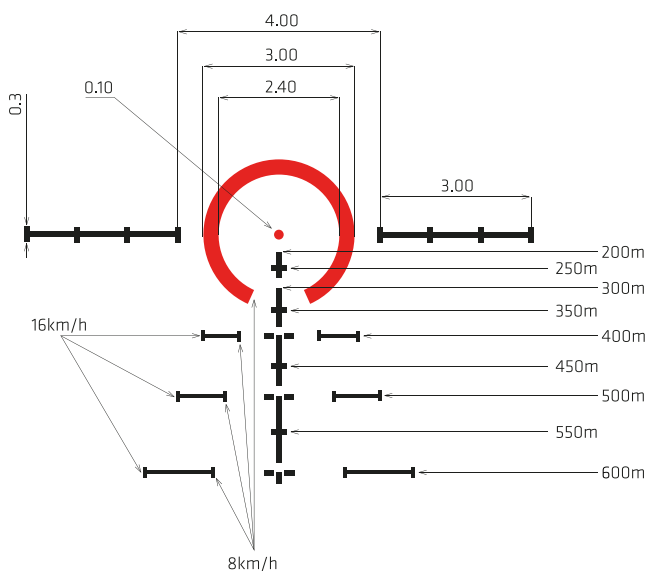

Central 3.0mrad horseshoe enables instinctive targeting. BDC calibrated out to 600 meters for the average of .223 Remington (55gr M193 and 62gr M855 out of 50cm barrel). Windage bars for 8km/h and 16km/h wind up to 600 meters. D²BR reticle was designed in collaboration with a US-based gun writer Ilya Koshkin, sometimes referred to as the Dark Lord of Optics.

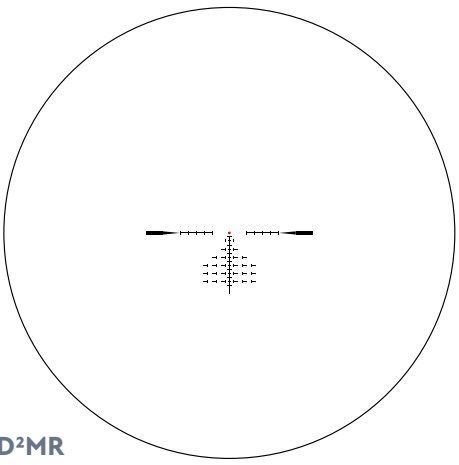

**D²MR**  
**MRAD @ 6x**  
Enables fast multi-variable management.

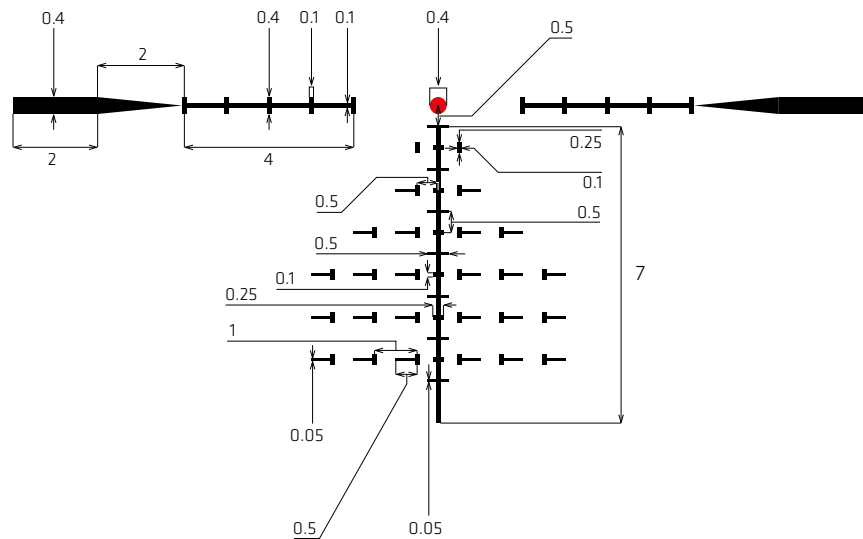

Correction markers for wind and object speed. For precision over medium distances. MRAD calibrated.

Extremely wide viewing angle.

Huge 44mrad elevation adjustment range.

1x magnification enables both eyes open shooting like a red dot sight.

6x magnification for precise 600m shooting.



Counter Clockwise (CCW).

with Reticle D²BR  
**SKU DO-2391**

with Reticle D²MR  
**SKU DO-2390**

|                      |                 |
|----------------------|-----------------|
| Magnification Range  | 1x – 6x         |
| Objective Diameter   | 24mm            |
| Field of View @ 100m | 35.7m – 6m      |
| Eye Relief           | 89 – 99mm       |
| Diopter Range        | -3D/+2.2D       |
| Water Proof (N2)     | 0.3kg/cm²       |
| Reticle Position     | 2nd focal plane |
| Illumination         | Dot*            |
| Counter Clockwise    | YES             |
| Per Click            | 0.1mrad         |
| Per Revolution       | 6mrad           |
| Elev Adj Range       | 44mrad          |
| Wind Adj Range       | 44mrad          |
| Tube Diameter        | 30mm            |
| Length               | 255mm           |
| Weight               | 510g            |
| Warranty             | 5 years         |

\* With Reticle D²BR, illumination Dot + Horseshoe

HORNET

PRISMATIC SIGHT 1x


Ultra compact | Sharp, well-defined aiming point | Diopter adjustment

Diopter adjustment.  
Ideal for anyone who, due to astigmatism, experience blur of the aiming point in traditional red dot.

Red dot with  
9 daytime modes,  
2 night-vision modes.

|                         |               |
|-------------------------|---------------|
| Magnification           | 1x            |
| Field of View @ 100 m   | 22.8m         |
| Objective Diameter      | 22mm          |
| Exit pupil              | 28.5mm        |
| Eye relief              | 137mm         |
| Dioptre range           | -2D /+2D      |
| Adjustment Range        | ≥60MOA        |
| Click Value             | 1MOA          |
| Waterproof              | 5m            |
| Operational Temperature | -30°C ~ +60°C |
| Dimensions              | 115x75x55mm   |
| Weight                  | 374g          |
| Battery                 | CR2032        |
| Warranty                | 5 years       |

SKU DO-2352

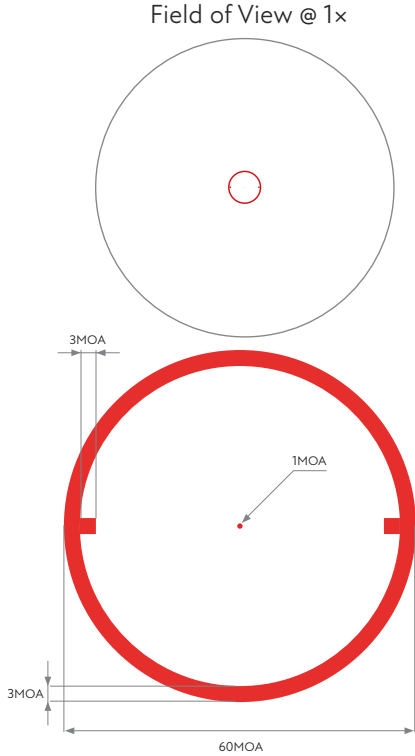

Ideal coupling with  
Hornet Ultra Compact  
Magnifier 3x

HORNET

ULTRA COMPACT  
MAGNIFIER 3x

Instant change from 1x to 3x | Precision Flip-To-Side Mount  
Works with all Red Dot, Holographic and 1x Prismatic Scopes

- Compatible with all red dot sights mounted at the absolute co-witness and lower 1/3 co-witness.
- Suitable for both right and left handed use.
- Tool-free azimuth and diopter adjustment.



INCLUDED:  
High-quality Flip-To-Side Mount.  
Change from 1x to 3x magnification.  
For right and left handed users.



|                      |            |
|----------------------|------------|
| Magnification        | 3x         |
| Objective Diameter   | 22mm       |
| Eye Relief           | 66.5mm     |
| Field of View @ 100m | 12.7m      |
| Dimensions           | 73x45x48mm |
| Weight               | 270g       |
| Warranty             | 5 years    |

SKU DO-2360





DEDICATED MOUNTING KITS

WEAVER/PICATINNY MOUNT

For Weaver and Picatinny rail.  
Weight: 20g  
SKU: DO-2840



CO-WITNESS MOUNT

For Weaver and Picatinny rail.  
Mount dedicated to AR-15.  
Enables simultaneous use of iron sights.  
Weight: 50g  
SKU: DO-2841



MOUNT FOR 6-14MM RAIL

For rails from 6 to 14mm.  
Weight: 34g  
SKU: DO-2825



Mount for 6-14 rail  
**SKU DO-2825**

Mount Beretta 92  
**SKU DO-2820**


Mount COLT 1911  
**SKU DO-2821**

Mount Glock 10mm  
**SKU DO-2822**

Mount Glock 9mm  
**SKU DO-2823**

Mount SIG P229  
**SKU DO-2824**

Mount CZ Shadow 2OR/CZ P-10OR  
**SKU DO-2316**

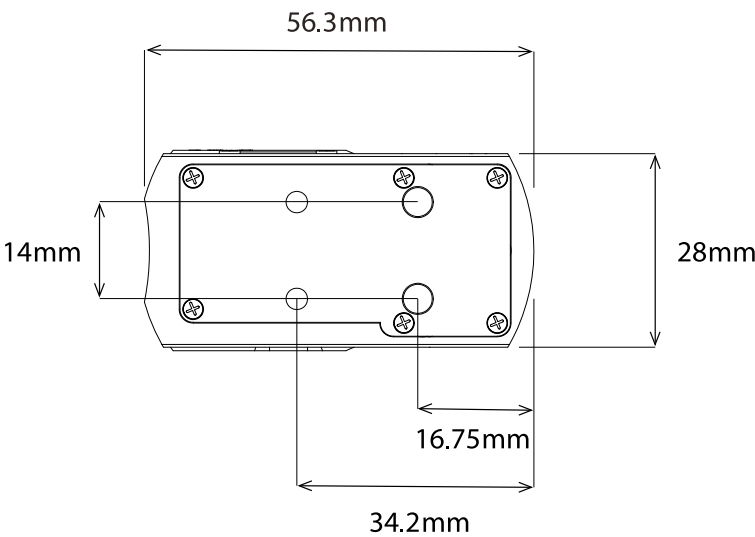

STRYKER  
REFLEX SIGHT

Huge 26 × 21.6mm lens

Shock resistant

Digital brightness adjustment

Compatible with  
AR platforms, shotguns,  
Open-Class pistols



- Parallax Free at 70m.
- 97% light transmission.
- 4, 6 or 8MOA illuminated red dot.
- Wide field of view.
- Shock-resistant one-piece aircraft grade aluminum housing.
- Standard CR2032 battery.
- Battery swap without removal.
- Activity detector sets sleep mode, increasing battery life.

|                       |                       |
|-----------------------|-----------------------|
| Magnification         | 1x                    |
| Dot size              | 4MOA / 6MOA / 8MOA    |
| Lens                  | 26x21.6mm             |
| Manual Dot Brightness | 10 positions          |
| Elev Adj Range        | 145MOA                |
| Wind Adj Range        | 95MOA                 |
| Waterproof            | 2m                    |
| Dimensions            | 56.5x29x32.5mm        |
| Weight                | 41.5g                 |
| Battery Life          | 320hrs (Brightness-3) |
| Battery               | CR2032                |
| Warranty              | 5 years               |

Stryker Reflex Sight (4MOA)  
**SKU DO-2326**

Stryker Reflex Sight (6MOA)  
**SKU DO-2328**

Stryker Reflex Sight (8MOA)  
**SKU DO-2329**

DELTA

COMPACTDOT HD

Ultra compact | Sharp, well-defined aiming point | Robust build



|                    |              |
|--------------------|--------------|
| Magnification      | 1x           |
| Objective Diameter | 28mm         |
| Dot size           | 3MOA         |
| Dimensions         | 68×51.5×58mm |
| Weight             | 144g         |
| Mount              | Weaver 22mm  |
| Battery            | CR2032       |
| Warranty           | 5 years      |

- Small reliable tube red dot.
- One size illuminated aim point.
- 11-step brightness control dial.
- Integrated Weaver.
- Optional reduction to 11mm rail.

CompactDot HD

SKU DO-2324

DELTA

MINIDOT 3

Compact | Wide field-of-view | Automatic light sensor



- Automatic light sensor.
- Picatinny rail mount.
- Docter footprint.
- 3 MOA dot size.

|                |                          |
|----------------|--------------------------|
| Magnification  | 1x                       |
| Lens           | 28×20mm                  |
| Dot size       | 3MOA                     |
| Elev Ajd Range | 120MOA                   |
| Wind Ajd Range | 120MOA                   |
| Dimensions     | 51.7×30×29mm             |
| Weight         | 34.9g (50.9g with mount) |
| Waterproof     | Yes                      |
| Footprint      | Docter                   |
| Battery        | CR1632                   |
| Battery Life   | 30.000hrs*               |

\*At the lowest light intensity.  
In the box: Picatinny mount.

MiniDot 3

SKU DO-2302



DELTA

MULTIDOT HD 25

Robust build | Sharp, well-defined aiming point | Dot size adjustment



|                    |                           |
|--------------------|---------------------------|
| Magnification      | 1×                        |
| Objective Diameter | 25mm                      |
| Dot size           | 2, 4, 6, 8MOA             |
| Dimensions         | 137×45×55mm               |
| Weight             | 144g                      |
| Mount              | 30mm rings to Weaver 22mm |
| Battery            | CR2032                    |
| Warranty           | 5 years                   |

Dot size adjustment 2, 4, 6, 8MOA.

Comfortable, easy.

Accurate in all weather.

Superb build quality.

MultiDot HD 25  
SKU DO-2322

DELTA

MULTIDOT HD 36

Robust build | Sharp, well-defined aiming point | Dot size adjustment



Dot size adjustment 2, 4, 6, 8MOA.

Comfortable, easy.

Accurate in all weather.

Superb build quality.

|                    |               |
|--------------------|---------------|
| Magnification      | 1×            |
| Objective Diameter | 36mm          |
| Dot size           | 2, 4, 6, 8MOA |
| Dimensions         | 113×71×67.5mm |
| Weight             | 236g          |
| Mount              | Weaver 22mm   |
| Battery            | CR2032        |
| Warranty           | 5 years       |

MultiDot HD 36  
SKU DO-2323

DELTA

# MINIDOT HD 26

- For rifle and pistol
- Wide field-of-view
- Adjustable brightness
- Compact



|               |                      |
|---------------|----------------------|
| Magnification | 1x                   |
| Dot size      | 2MOA / 6MOA          |
| Lens          | 26x19mm              |
| Dimensions    | 51x28x33mm           |
| Weight        | 40g (74g with mount) |
| Mount         | Weaver 22mm*         |
| Battery       | CR2032               |
| Warranty      | 5 years              |

\*MiniDot HD 26 (2MOA)  
**SKU DO-2321**

\*MiniDot HD 26 (6MOA)  
**SKU DO-2327**

MiniDot HD 26 (6MOA)  
(without mount)  
**SKU DO-2335**

Mounting:  
How-To video  
CZ Shadow 2 OR  
CZ P-10 OR



MOUNTING KITS

- Mount for 6-14 rail  
**SKU DO-2825**
- Mount Beretta 92  
**SKU DO-2820**
- Mount COLT 1911  
**SKU DO-2821**
- Mount Glock 10mm  
**SKU DO-2822**
- Mount Glock 9mm  
**SKU DO-2823**
- Mount SIG P229  
**SKU DO-2824**
- Mount CZ Shadow 2 OR/  
CZ P-10 OR  
**SKU DO-2314**
- AR-15 spacer  
**SKU DO-2818**

DELTA

# CARBON FIBRE TRIPOD

Specifically engineered for shooting



- Heavy load capacity.
- Low center of gravity  
for extra stability.
- Carbon lightweight.
- Quick connect.



Ball diameter 65mm  
and 47.5 degrees tilt,  
prevents heavy load  
tumbling the tripod.

INCLUDED:  
Spikes and  
Rubber.

INCLUDED:  
Arca/Picatinny  
Head Mount.  
Other mounts  
are available.

|                 |         |
|-----------------|---------|
| Max Height      | 165cm   |
| Min Height      | 14.4cm  |
| Folded Length   | 63cm    |
| Folded Diameter | 14.85cm |
| Max Load        | 30Kgs   |
| Weight          | 2300g   |

Tripod ST **DO-9950**  
Tripod ST-C **DO-9951**



DELTA

# RANGEFINDER

Compact and lightweight | Fast readout  
RF1200 | RF2000 | RF4000

|                        |                      |
|------------------------|----------------------|
| Magnification          | 6x                   |
| Objective Diameter     | 23mm                 |
| Field of View @ 1000m  | 105m / 6°            |
| Eye Relief             | 17mm                 |
| Diopter Adjustment     | ±3                   |
| Lens Coatings          | HD Multilayer        |
| Measuring Range RF1200 | 4.6-1100m / 5-1200yd |
| Measuring Range RF2000 | 4.6-1830m / 5-2000yd |
| Measuring Range RF4000 | 4.6-3660m / 5-4000yd |
| Measuring Time         | 0.3s max   1.5s max* |
| Accuracy @ 5-100m      | ± 0.5m   ± 1m*       |
| Accuracy @ 100-200m    | ± 1m   ± 2m*         |
| Accuracy @ 200-500m    | ± 2m                 |
| Accuracy @ >500m       | ± 0.5%               |
| Angle                  | Yes                  |
| Angle Range            | -89° to +89°         |
| Vertical Offset        | Yes                  |
| Horizontal Distance    | Yes                  |
| Scan Mode              | Yes                  |
| Laser Type             | Class 1   Class 3R*  |
| Beam Diverge Vertical  | 1.1mrad   4.5mrad*   |
| Beam Diverge Hrzntrl   | 0.125mrad   1.0mrad* |
| Display Type           | LCD                  |
| Operating Temperature  | -10°C/50°C           |
| Waterproof             | IPX4                 |
| Chassis                | PS+GF                |
| Weight                 | 190g (inc battery)   |
| Dimensions             | 102×35×70mm          |
| Battery                | CR2 (3V)             |
| Warranty               | 5 years              |

\* Only in RF4000



Measurement displayed within 0.3 seconds.

Single measurement or continuous scan up to 8 seconds.

Angle calculation.

Displays equivalent horizontal range.

Compensates for angled measurement.

RF1200 **SKU DO-2700**  
RF2000 **SKU DO-2701**  
RF4000 **SKU DO-2702**

DELTA

# OLED.RANGEFINDER

Compact and lightweight | Fast readout | Ultra-rugged | Extra-bright OLED  
RF1200 | RF2000



Measurement displayed within 0.3 seconds.

Single measurement or continuous scan up to 8 seconds.

Angle calculation.

Displays equivalent horizontal range.

Compensates for angled measurement.

RF1200 **SKU DO-2703**  
RF2000 **SKU DO-2704**

|                        |                      |
|------------------------|----------------------|
| Magnification          | 7x                   |
| Objective Diameter     | 24mm                 |
| Field of View @ 1000m  | 115.32m / 6.6°       |
| Eye Relief             | 15.5mm               |
| Diopter Adjustment     | ±4                   |
| Lens Coatings          | Multi Coating        |
| Measuring Range RF1200 | 4.6-1100m / 5-1200yd |
| Measuring Range RF2000 | 4.6-1830m / 5-2000yd |
| Measuring Time         | 0.8s max             |
| Accuracy @ 5-100m      | ± 0.9m               |
| Accuracy @ 100-200m    | ± 1.8m               |
| Accuracy @ 200-500m    | ± 2.7m               |
| Accuracy @ >500m       | ± 0.5%               |
| Angle                  | Yes                  |
| Angle Range            | -85° to +85°         |
| Vertical Offset        | Yes                  |
| Horizontal Distance    | Yes                  |
| Scan Mode              | Yes                  |
| Laser Type             | 905nm PLD            |
| Beam Diverge Vertical  | 2.37mrad             |
| Beam Diverge Hrzntrl   | 0.474mrad            |
| Display Type           | OLED                 |
| Operating Temperature  | -10°C/50°C           |
| Waterproof             | IPX4                 |
| Chassis                | PS+GF                |
| Dimensions             | 102×38.5×71mm        |
| Battery                | CR2 (3V)             |

TITANIUM

70ED / 85ED

Delta Unique Optical System | ED glass | Compact and lightweight



|                       | 70ED               | 85ED               |
|-----------------------|--------------------|--------------------|
| Magnification         | 20 - 48x           | 25 - 60x           |
| Objective Diameter    | 70mm               | 85mm               |
| Field of View @ 1000m | 46 - 25m           | 36 - 20m           |
| Min. Focus Distance   | 4m                 | 5m                 |
| Eye Relief            | 16mm               | 16mm               |
| Exit Pupil            | 3.5mm - 1.5mm      | 3.4mm - 1.4mm      |
| Lens                  | ED                 | ED                 |
| Lens Coating          | Fully-multi coated | Fully-multi coated |
| Chassis               | Magnesium Alloy    | Magnesium Alloy    |
| Waterproof            | 1m/15min           | 1m/15min           |
| Weight                | 1350g              | 1580g              |
| Dimensions            | 308x155x85mm       | 350x155x98mm       |

70ED **SKU DO-1909**  
85ED **SKU DO-1908**

FOREST ED

8x42  
10x42  
10x50  
12x50



|                       | 8x42         | 10x42        | 10x50        | 12x50        |
|-----------------------|--------------|--------------|--------------|--------------|
| Magnification         | 8x           | 10x          | 10x          | 12x          |
| Objective Diameter    | 42mm         | 42mm         | 50mm         | 50mm         |
| Field of View @ 1000m | 142m         | 113m         | 114m         | 93m          |
| Min. Focus Distance   | 2m           | 2.5m         | 3m           | 3m           |
| Eye Relief            | 17.2mm       | 15.2mm       | 16.9mm       | 15mm         |
| Exit Pupil            | 5.2mm        | 4.27mm       | 5.1mm        | 4.2mm        |
| Lens                  | ED           | ED           | ED           | ED           |
| Lens Coating          | FBMC         | FBMC         | FBMC         | FBMC         |
| Chassis               | Magnalium    | Magnalium    | Magnalium    | Magnalium    |
| Waterproof            | 1.5m/3min    | 1.5m/3min    | 1.5m/3min    | 1.5m/3min    |
| Weight                | 650g         | 650g         | 950g         | 950g         |
| Dimensions            | 147x127x56mm | 147x127x56mm | 165x133x60mm | 165x133x60mm |

ED 8x42 **SKU-1305**  
ED 10x42 **SKU-1306**  
ED 10x50 **SKU-1307**  
ED 12x50 **SKU-1308**



DELTA-T

9x45.HD.RF

Exquisite optical quality, flouride glass.

Fast, precise laser range-finding to 2375m.

Superb mechanical strength and build quality.

Compact, lightweight, excellent balance.

| OPTICS / CONSTRUCTION |                    |
|-----------------------|--------------------|
| Magnification         | 9x                 |
| Objective Diameter    | 45mm               |
| Field of View @ 1000m | 117m               |
| Min. Focus Distance   | 3.5m               |
| Eye Relief            | 17mm               |
| Exit Pupil            | 4.8mm              |
| Diopter Adjustment    | ±4                 |
| Twilight Factor       | 18.3               |
| Luminosity            | 27                 |
| Lens Glass            | Fluoride           |
| Lens Coating          | Fully Multi-Coated |
| Prisms                | Schmidt-Pechan     |
| Chassis               | Magnesium Alloy    |
| Operating Temperature | -15°C to +55°C     |
| Storage Temperature   | -20°C to +70°C     |
| Waterproof            | 1m / 30min (IPX7)  |
| Weight                | 965g               |
| Warranty              | 10 years           |

| RANGEFINDER         |                       |
|---------------------|-----------------------|
| Laser Range         | 2377m                 |
| Min. Laser Range    | 13.5m                 |
| Range Reflective    | 2377m                 |
| Range Buildings     | 1828m                 |
| Range Deer          | 750m                  |
| Measuring Time      | 0.25s max             |
| Accuracy            | ±1m < 1km / ±2m > 1km |
| Angle               | Yes                   |
| Angle Range         | -70° to +70°          |
| Angle Accuracy      | ±1°                   |
| Vertical Offset     | Yes                   |
| Horizontal Distance | Yes                   |
| Scan Mode           | Yes                   |
| Laser Type          | Class 1               |
| Laser Wave Length   | 905nm                 |
| Display Type        | OLED (red)            |
| Brightness Adjust   | 5 levels              |
| Power Saver         | 10s Auto Shutoff      |
| Battery             | CR2 (3V)              |



SKU DO-2720

Delta Optical  
Nowe Osiny, ul. Piękna 1  
05-300 Mińsk Mazowiecki  
Poland

[deltaoptical.com](http://deltaoptical.com)  
[BetterForever@deltaoptical.eu](mailto:BetterForever@deltaoptical.eu)





