

JAVELIN


3.5-21x50 FFP

Short and lightweight | High quality ED glass | Side focus from 10m


Counter Clockwise (CCW).

Elevation turret:
locking with zero stop
and turn indicator.


Magnification Range	3.5x – 21x
Objective Diameter	50mm
Field of View @ 100m	10.9m - 1.8m
Eye Relief	96.4mm
Diopter Range	-2D/+2D
Water Proof (N2)	0.3kg/cm ²
Reticle Position	1st focal plane
Illumination	Dot + cross
Counter Clockwise	YES
Per Click	0.1mrad
Per Revolution	10mrad
Elev Adj Range	29mrad
Wind Adj Range	29mrad
Parallax Adjustment	10m – ∞
Zero-Stop	YES
Tube Diameter	34mm
Length	353mm
Weight	890g
Warranty	10 years

with Reticle MKR-1
SKU DO-2473with Reticle MKR-2
SKU DO-2474

Field of View @ 3.5x




Field of View @ 21x

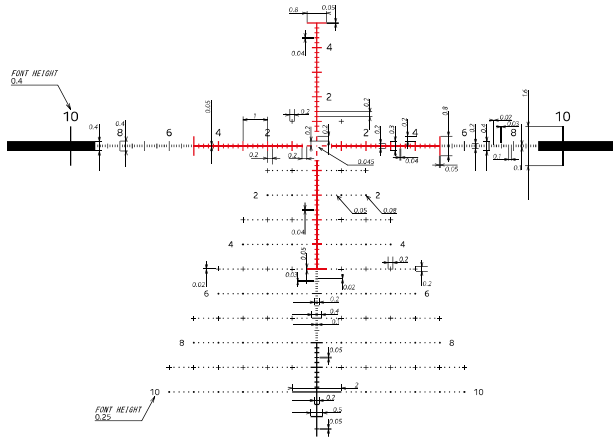


MKR-1 MRAD


Based on MRAD enables quick elevation, wind correction and determining target distance. Target point is 0.1mrad. Hashes every 0.2mrad. 10mrad Christmas tree.



Field of View @ 3.5x



Field of View @ 21x

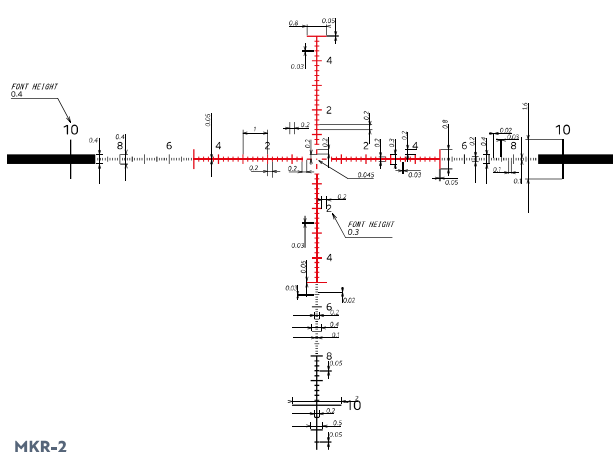

MKR-2 MRAD

Based on MRAD enables quick elevation, wind correction and determining target distance. Target point is 0.1mrad. Hashes every 0.2mrad.

